




# MPC TYPE "UFIX-BSL"

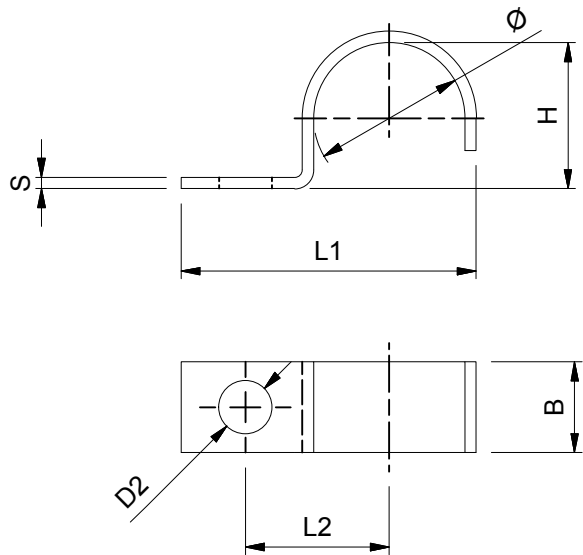

| BSL type 510 (DIN 72571); MPC code: UFIX-1xØ |           |             |             |            |               |                 |
|----------------------------------------------|-----------|-------------|-------------|------------|---------------|-----------------|
| Clamping Diameter                            | For Cable | Fixing Hole | Clamp Hight | Ear length | Place of hole | Metal dimension |
| Ø                                            |           | D2          | H           | L1         | L2            | BxS             |
| 4                                            | 1         | 4,8         | 3,5         | 18         | 9             | 10x1            |
| 5                                            | 1         | 4,8         | 4,5         | 18,5       | 9             | 10x1            |
| 6                                            | 1         | 4,8         | 5,5         | 20         | 10            | 10x1            |
| 7                                            | 1         | 4,8         | 6,5         | 20,5       | 10            | 10x1            |
| 8                                            | 1         | 4,8         | 7,5         | 22         | 11            | 10x1            |
| 9                                            | 1         | 4,8         | 8,5         | 22,5       | 11            | 10x1            |
| 10                                           | 1         | 4,8         | 9,5         | 23         | 11            | 10x1            |
| 11                                           | 1         | 5,8         | 10,5        | 30         | 15            | 12x1.5          |
| 12                                           | 1         | 5,8         | 11,3        | 30,5       | 16            | 12x1.5          |
| 15                                           | 1         | 5,8         | 14,3        | 34         | 18            | 12x1.5          |
| 16                                           | 1         | 5,8         | 15,3        | 35         | 18            | 12x1.5          |
| 18                                           | 1         | 7           | 17,3        | 35,5       | 18            | 12x1.5          |
| 20                                           | 1         | 7           | 19,3        | 37,5       | 19            | 12x1.5          |
| 22                                           | 1         | 7           | 21,3        | 39,5       | 20            | 12x1.5          |
| 24                                           | 1         | 7           | 23,3        | 41,5       | 21            | 12x1.5          |

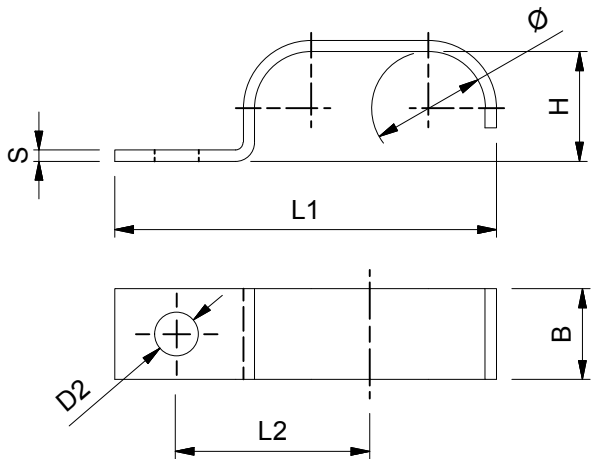


| BSL type 510 (DIN72571); MPC code: UFIX-2xØ |           |             |             |             |            |               |                 |
|---------------------------------------------|-----------|-------------|-------------|-------------|------------|---------------|-----------------|
| Clamping Diameter                           | For Cable | Clamp Width | Fixing Hole | Clamp Hight | Ear length | Place of hole | Metal dimension |
| Ø                                           |           | A           | D2          | H           | L1         | L2            | BxS             |
| 4                                           | 2         | 8,5         | 4,8         | 3,5         | 22,5       | 11            | 10x1            |
| 5                                           | 2         | 10,5        | 4,8         | 4,5         | 24         | 11,5          | 10x1            |
| 6                                           | 2         | 12,5        | 4,8         | 5,5         | 26,5       | 13            | 10x1            |
| 7                                           | 2         | 14,5        | 4,8         | 6,5         | 28         | 13,5          | 10x1            |
| 8                                           | 2         | 16,5        | 4,8         | 7,5         | 30,5       | 15            | 10x1            |
| 10                                          | 2         | 20,5        | 4,8         | 9,5         | 33,5       | 16            | 10x1            |
| 12                                          | 2         | 24,5        | 5,8         | 11,3        | 43         | 22            | 12x1.5          |
| 15                                          | 2         | 30,5        | 5,8         | 14,5        | 49         | 25,3          | 12x1.5          |

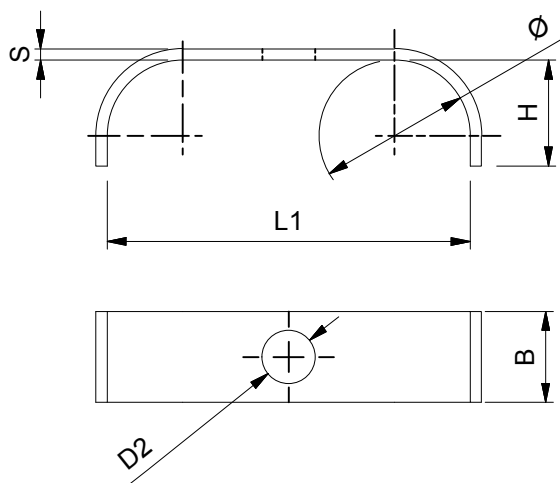

| BSL type 511 (DIN72572); MPC code: UFIX-2xØxBxS |             |             |              |                 |
|-------------------------------------------------|-------------|-------------|--------------|-----------------|
| Clamping Diameter                               | Fixing Hole | Clamp Hight | Clamp length | Metal dimension |
| Ø                                               | D2          | H           | L1           | BxS             |
| 5                                               | 4,8         | 4           | 16           | 10x1            |
| 6                                               | 4,8         | 5           | 18           | 10x1            |
| 7                                               | 4,8         | 5           | 20           | 10x1            |
| 8                                               | 4,8         | 6           | 22           | 10x1            |
| 10                                              | 4,8         | 7           | 26           | 10x1            |
| 12                                              | 5,8         | 8           | 31           | 12x1.5          |
| 15                                              | 5,8         | 10          | 37           | 12x1.5          |
| 18                                              | 7           | 13          | 44           | 12x1.5          |
| 20                                              | 7           | 14          | 48           | 12x1.5          |
| 22                                              | 7           | 16          | 52           | 12x1.5          |



Material:  
DC 01;  
DISP passivated

Third angle projection:  


Part number:  
**UFIX-BSL**

Description:  
MPC Industries, U-Fix, BSL type:  
510, 511 pipe clamp

Revision:  
  
Format:  
**A3**

Drawn by: Gyula

Creation date: 17-9-2014

Scale 1:1

Units: mm

MPC Industries B.V. Badweg 38 8401 BL Gorredijk Postbus 225 8400 AE Gorredijk. Tel.: . 0513 465477 Fax:.. 0513 465736